


4. From underneath the basin, secure the faucet body to the basin by feeding the following parts over the Water Inlet Hoses in the following order: Rubber Gasket (6), Plastic Gasket (7), Lock Nut (8). Tighten the Lock Nut (8) using a wrench.

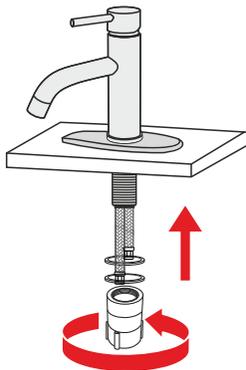

5. Connect and tighten the HOT (red) and COLD (blue) Water Inlet Hoses (9) to the hot and cold water supply. Don't overbend the hose and ensure there is no hose deformation after installation.


Note: Both Water Inlet Hoses come with a rubber gasket inside the openings-make sure the gaskets are in place before connecting.

6. Open the water supply while the faucet handle/lever is still in OFF position, and check for leaks. If you discover any leaks, check the connections to ensure they are installed properly.


7. Turn on the hot and cold water using the faucet handle/lever, and flush the water lines for one minute.

INSTALLING THE POP-UP DRAIN (optional)

1. Remove the Drain Gasket (a), Drain Washer (b), and Drain Nut (c) from the Pop-Up Drain (d).




2. Place the Drain Gasket (a) on top of the drain opening and then insert the Pop-Up Drain (d) through the Drain Gasket (a) and into the drain opening.

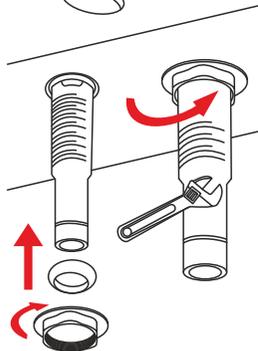

3. From underneath the drain opening, install the Drain Washer (b) onto the Pop-Up Drain (d) and then attach and tighten then the Drain Nut (c) using a wrench.

4. Connect the Pop-Up Drain Assembly (10) with the drain pipe.

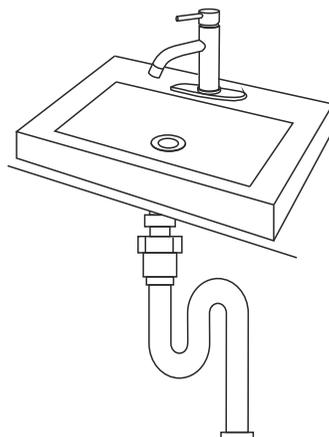

CARE AND CLEANING

We recommend cleaning the Premium Single-Hole Bathroom Faucet with a mild detergent, rinsing thoroughly with warm water, and drying with a clean, soft cloth.

Never use cleaners containing abrasives (including abrasive sponges or steel wool), ammonia, bleach or sodium hypochlorite, organic solvents (e.g., alcohols), or other harsh chemicals (e.g., limescale removers) to clean the Premium Single-Hole Bathroom Faucet, as they may damage the finish.



Müller USA

168 Mason Way Unit #4A,
City of Industry, CA 91746

Telephone: (888) 632-9981

E-mail: support@muellerdirect.com

Web: www.muellerdirect.com

Müller
AUSTRIA

Premium Single-Hole Bathroom Faucet

Model No: BF-550



User Manual

Your satisfaction is guaranteed. If you are not completely satisfied with our Premium Single-Hole Bathroom Faucet and the results it brings, we insist that you let us know. We'll help make the Premium Single-Hole Bathroom Faucet work for you, or we'll refund your money.

PRE-INSTALLATION INSTRUCTIONS

• Before installation, **make sure you have all the necessary parts** by checking the PARTS LIST. If any part is missing or damaged, do not attempt to install the product. Contact Mueller Customer Service.


• Always **close the water supply** before removing the existing faucet or disassembling the valve. Open the existing faucet handle to relieve water pressure and that way, ensuring that the water is completely shut off. **Remove the existing faucet.**

• **Clean** the basin and counter top to remove any debris, plumber's putty, and silicone. Ensure all fittings and end connections are free of debris.

• TECHNICAL REQUIREMENTS:

- o Water supply pressure: 0.1MPa-1.0MPa. If the water supply pressure exceeds 1.0MPa, a pressure reducing valve should be installed.
- o Water supply temperature: maximum 194°F / 90°C

• TOOLS AND HARDWARE REQUIRED



Adjustable Wrench



Safety Goggles

PARTS LIST




INSTALLATION INSTRUCTIONS


INSTALLING THE FAUCET

Note: The Faucet comes preinstalled with the HOT and COLD Water Inlet Hoses (9). Start with the installation steps without detaching the hoses from the faucet.

1. Attach the Threaded pipe (5), by feeding the Water Inlet Hoses (9) through, then tightening onto the Faucet (1) by turning anti-clockwise.

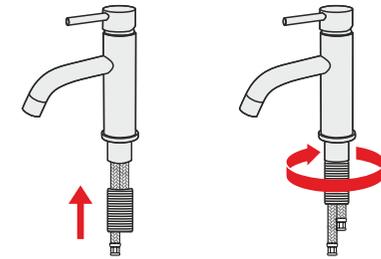

2. Slide on the Rubber O-ring (3) over the Threaded Pipe (5) until it sits against the Faucet Base (2).

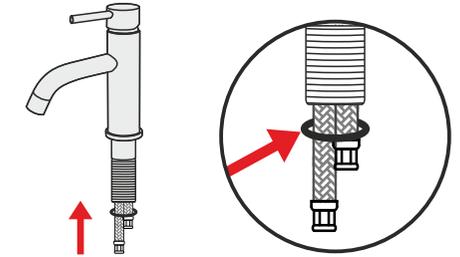

3. Place the Deck Plate (4) in position over the mounting hole in the basin. Feed the Water Inlet Hoses (9) and Threaded Pipe (5) through the Deck Plate until the Rubber O-Ring (3) and Faucet Base (2) sit on top of the Deck Plate.

